

# PROJECTS



## NMB SPLICE-SLEEVE® SYSTEMS

Your Trusted Rebar Splicing Solution



Australia 108, Australia



Megamall, Romania



Museum of Art, U.S.A.



Little Island Pier55, U.S.A.



Elevated Railway, Japan




Paramount Tower, U.S.A.



National Stadium, Japan



Autzen Stadium, U.S.A.

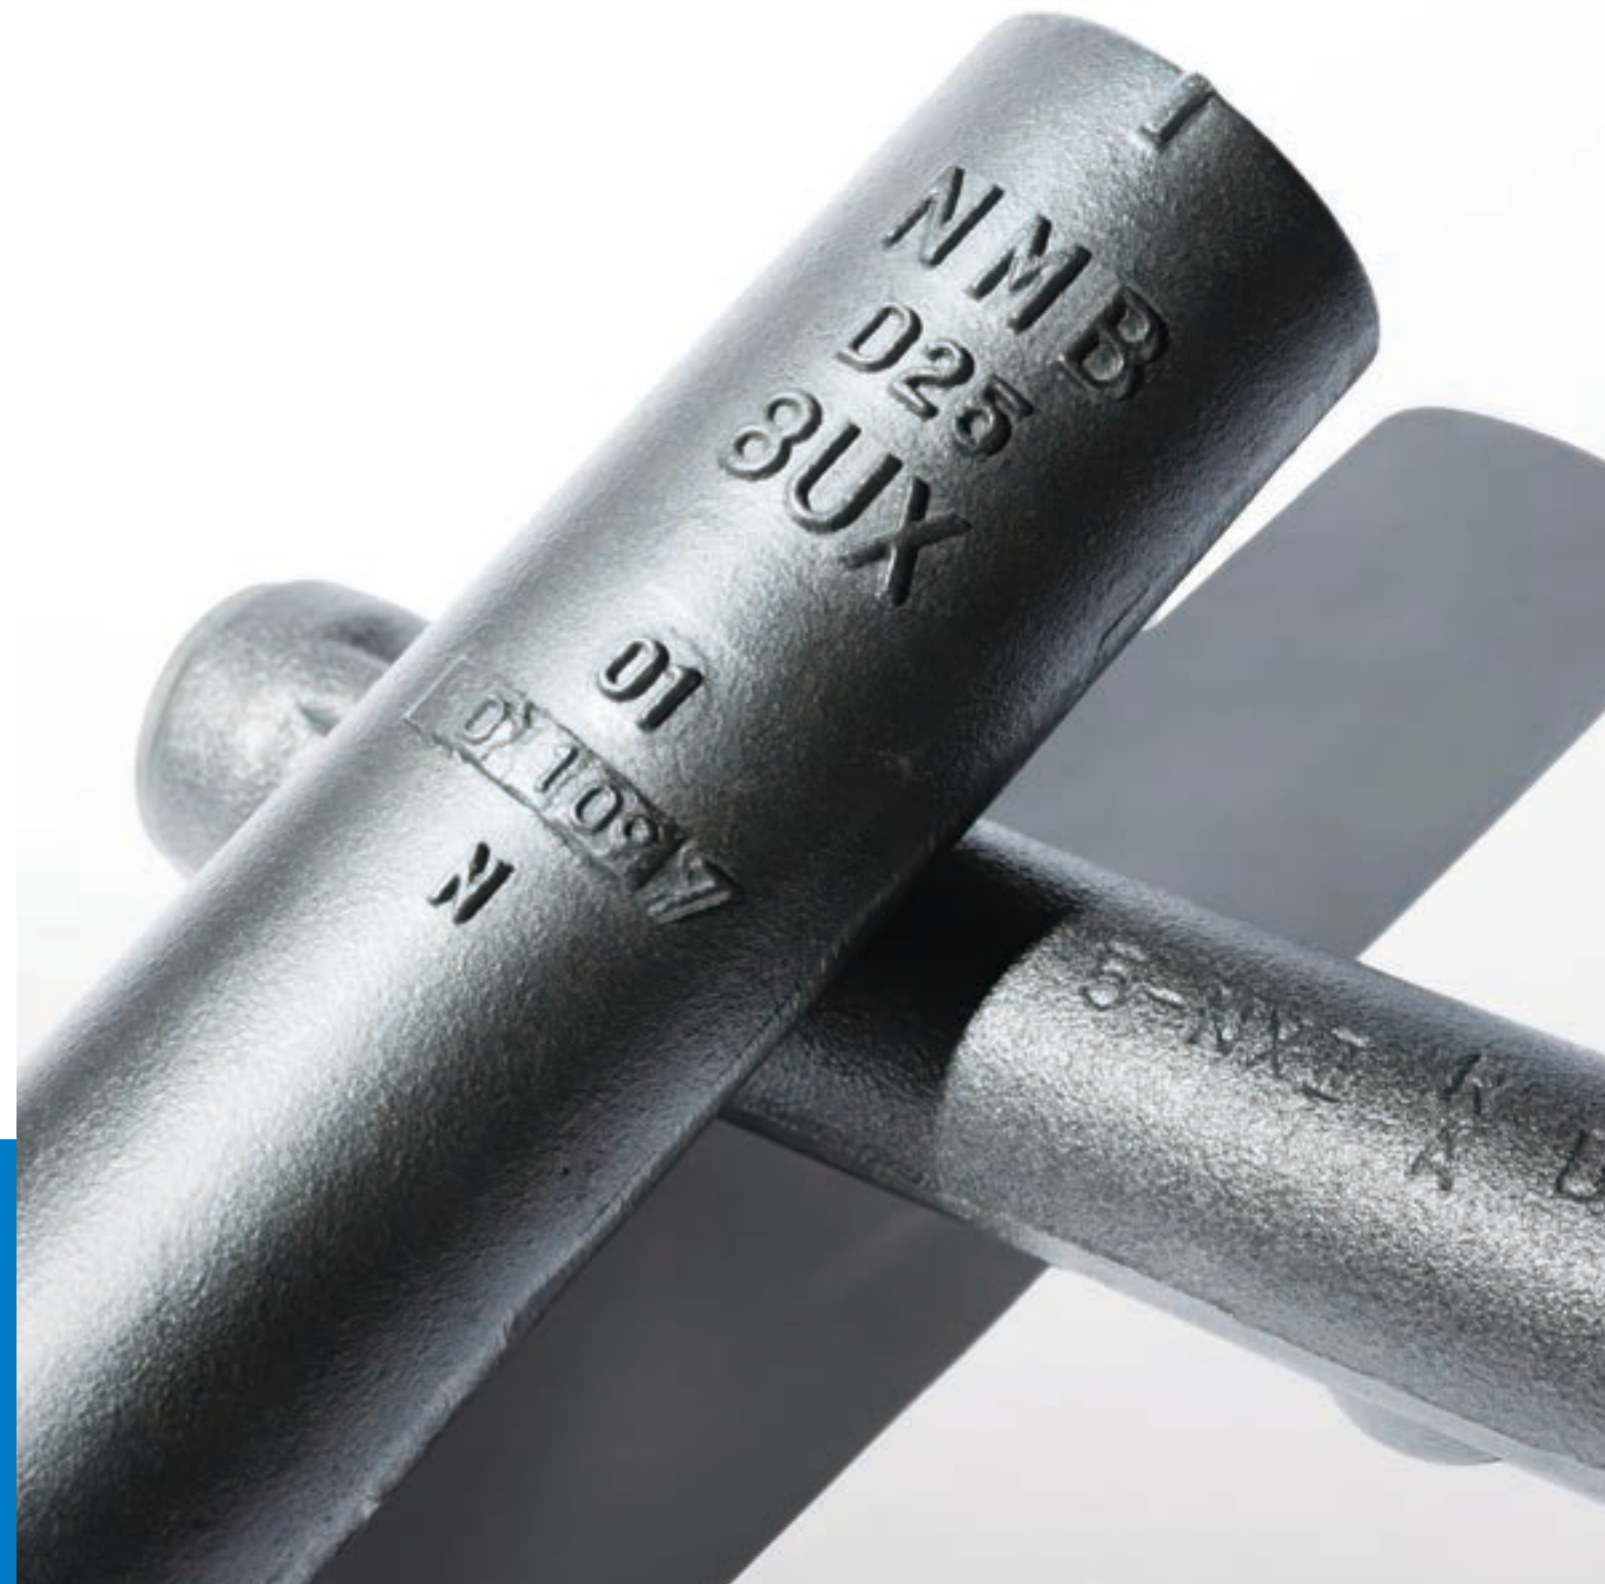

**NISSCO SPLICE SLEEVE JAPAN, LTD**

SPLICE SLEEVE GROUP

**SPLICE SLEEVE JAPAN, LTD. Corporate Office**

17-1 Nihonbashi, Hakozaiki-cho, Chuo-ku,  
Tokyo, 103-0015 Japan  
Tel: +81 3 5642 6120 Fax: +81 3 5642 6150

**SPLICE SLEEVE JAPAN, LTD.  
Nissco Technical Center (NTC)**

313-5 Mukaimachi Minamihanashima, Matsudo-shi,  
Chiba, 271-0065, Japan  
Tel: +81 4 7308 3681 Fax: 81 4 7308 3682

**SPLICE SLEEVE JAPAN, LTD.  
Osaka Branch**

4-7-7 Hiranomachi, Chuo-ku,  
Osaka, 541-0046 Japan  
Tel: +81 6 6222 1321

**SPLICE SLEEVE(S) PTE LTD.**

601 Sims Drive #01-06 Pan-I Complex  
Singapore 387382  
Tel: +65 6738 3655

**SPLICE SLEEVE NORTH AMERICA, INC.**

135 N. Old Woodward Ave., Suite 222,  
Birmingham, MI 48009 U.S.A.  
Tel: +1 734 838 0420



<https://www.nmbspliceleeve.com>  
Ver. 202410



# WE OFFER SIMPLE, SPEEDY, VERSATILE, AND DURABLE CONNECTION.




The original grout-filled mechanical connector approved worldwide. More than 45 million sleeves used worldwide for over 47 years. This patented system is a mechanical coupler for splicing reinforcing bars which uses a cylindrical ductile iron casting filled with a Portland cement based non-shrink high early strength grout for precast and cast-in-place concrete construction.

## What are the outstanding features of the NMB Splice-Sleeve® Systems?

- Splicing any type of the reinforcing bars.
- No shrinkage, elongation or damage of the reinforcing bar when spliced.
- Accept misaligned reinforcing bars with enough tolerance.
- Special high quality grout is developed by our Splice Sleeve engineers.
- No failures ever reported, used in plastic hinge areas in the highest seismic zones.
- Does not require special skills or certification.

## NMB Splice-Sleeve Systems® contributes to the industry in:

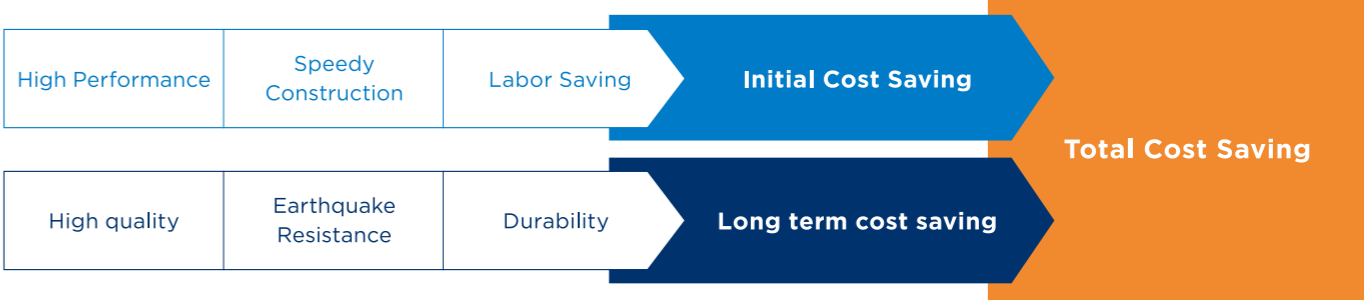



## Precast Application UX (SA) / NX II

Super UX / NXII can be used in a wide range of construction for structural and civil engineering applications. It is mainly used in precast members as a structural connection as well as in areas such as columns and beams requiring higher strength rebar splices.

Sleeve	Certifications	Rebar size
UX (SA)	ICC-ES Type 1 / 2 / 2HS (USA) Class SA / Class A (Japan) ISO15835 Category S/ B (Romania)	D16 - D41
NX II	Class A (Japan)	D10 - D51




## CLASSIFICATION OF REBER SPLICE PERFORMANCE BY BUILDING CENTER OF JAPAN

### Class SA connection:

The strength, rigidity and ductility are almost equivalent to those of rebars.

### Class A connection:

The strength and rigidity are almost equivalent, but the ductility is slightly inferior to rebars.

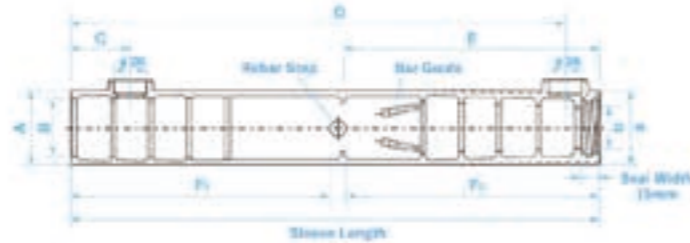

Sleeve	Rebar Size *(Applicable)	Sleeve Length (mm)	Sleeve Diameter (mm)		Inlet Port (C) (mm)	Outlet Port (D) (mm)	Rebar Stop (E) (mm)	Bar Embedment (mm)		Usage: Number of Sleeves to be grouted per a bag of		
			O.D. (A, a)	I.D.				Wide End (F <sub>1</sub> )	Narrow End (F <sub>2</sub> )	SS Mortar (15kg)	SSM120N (25kg)	
				Wide End (B)								Narrow End (b)
5UX(SA)	D16	245	45	32	22	193	105	80 ~ 110	95 ~ 105	35	53	
6UX(SA)	D19(D16)	285	49	36	25	223	120	95 ~ 125	110 ~ 120	27	41	
7UX(SA)	D22(D16,D19)	325	53	40	29	253	135	110 ~ 140	125 ~ 135	22	33	
8UX(SA)	D25(D19,D22)	370	58	44	31	283	150	125 ~ 155	140 ~ 150	18	28	
9UX(SA)	D29(D22,D25)	415	63	48	35	323	170	145 ~ 175	160 ~ 170	14	22	
10UX(SA)	D32(D25,D29)	455	66	51	39	363	190	165 ~ 195	180 ~ 190	12	18	
11UX(SA)	D35(D29,D32)	495	71	55	44	403	210	185 ~ 215	200 ~ 210	-	14	
12UX(SA)	D38(D32,D35)	535	77	59	47	443	230	205 ~ 235	220 ~ 230	-	12	
13/14UX(SA)	D41(D35,D38)	620	82	62	51	493	255	230 ~ 260	245 ~ 255	-	10	
						593	305	280 ~ 310	295 ~ 305	-	6	

5-NXII	D10,D13(D10)	220	44	32	22	193	105	80 ~ 110	95 ~ 105	35	53
6-NXII	D19(D13,D16)	250	48	36	25	223	120	95 ~ 125	110 ~ 120	27	41
7-NXII	D22(D16,D19)	280	52	40	29	253	135	110 ~ 140	125 ~ 135	22	33
8-NXII	D25(D19,D22)	310	56	44	31	283	150	125 ~ 155	140 ~ 150	18	28
9-NXII	D29(D22,D25)	350	60	48	35	323	170	145 ~ 175	160 ~ 170	14	22
10-NXII	D32(D25,D29)	390	64	51	39	363	190	165 ~ 195	180 ~ 190	12	18
11-NXII	D35(D29,D32)	430	69	55	44	403	210	185 ~ 215	200 ~ 210	-	14
12-NXII	D38(D32,D35)	470	75	59	47	443	230	205 ~ 235	220 ~ 230	-	12
13/14-NXII	D41(D35,D38)	520	79	62	51	493	255	230 ~ 260	245 ~ 255	-	10
16-NXII	D51(D38,D41)	620	96	74	62	593	305	280 ~ 310	295 ~ 305	-	6


\* ( ) indicates applicable bar sizes for transition splice

## Assembly

The NMB Splice-Sleeve® Systems are specially designed to facilitate construction at the job site, dramatically reduce construction schedule, and achieve strengths greater than that of the lap-spliced reinforcing bars.

Rebars are inserted into the embedded sleeves, and SS Mortar® grout is quickly injected into the sleeve. This method does not require special skills and makes construction easy, helping to reduce project costs by increasing erection speed.


Sleeve Setter (To hold sleeve in forms)

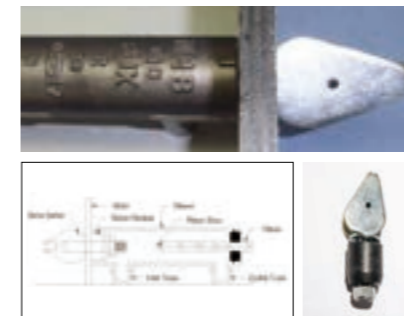


Precast wall production



Precast wall installation

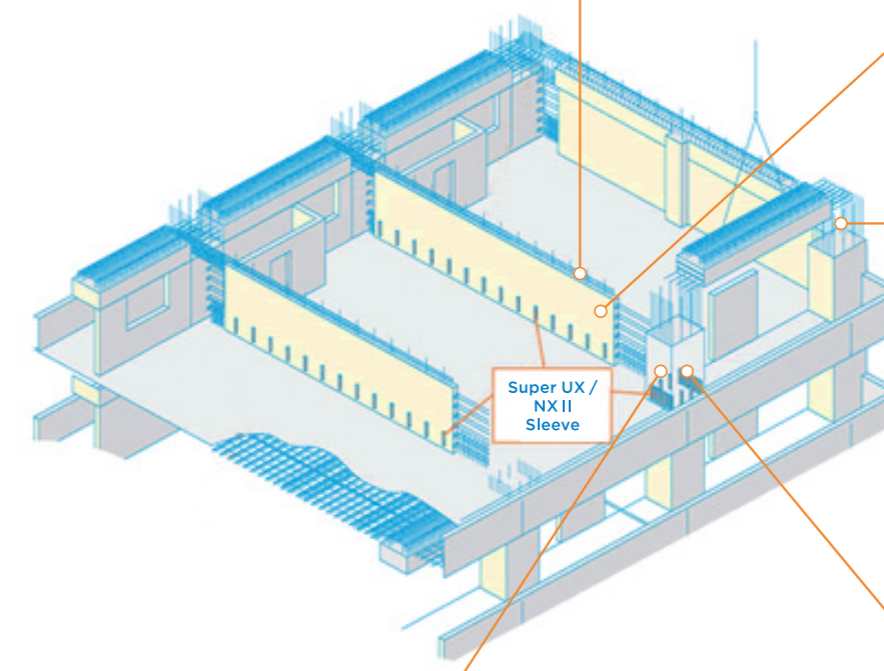


Precast column production

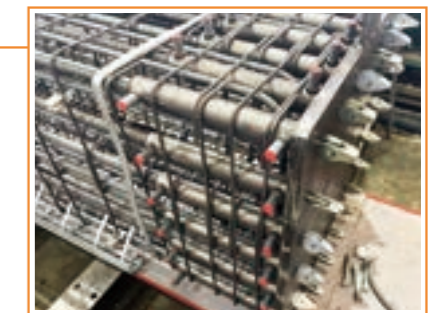

Precast column installation



MASS GROUTING™

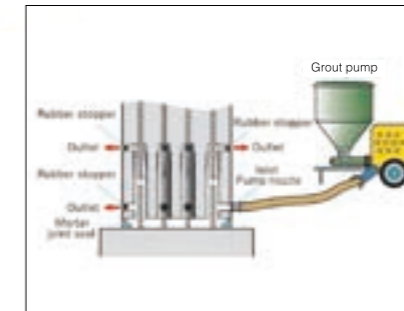

Precast column erection






## Cast-in-place Application Slim-Sleeve®

NMB Slim-Sleeve® is made for reinforcing bars to be spliced at jobsite. Rebars to be spliced are inserted into the sleeve to meet approximately at the center of the sleeve. The interior of the sleeve is filled with SS Mortar® grout. No bar end preparation is necessary, just slide the bar into the sleeve and grout it to complete the connection.



Sleeve	Certifications	Rebar size
Slim-Sleeve®	ICC-ES Type 1 / 2 / 2HS (USA) Class SA / Class A (Japan) ISO15835 Category S/ B (Romania)	D10 - D51

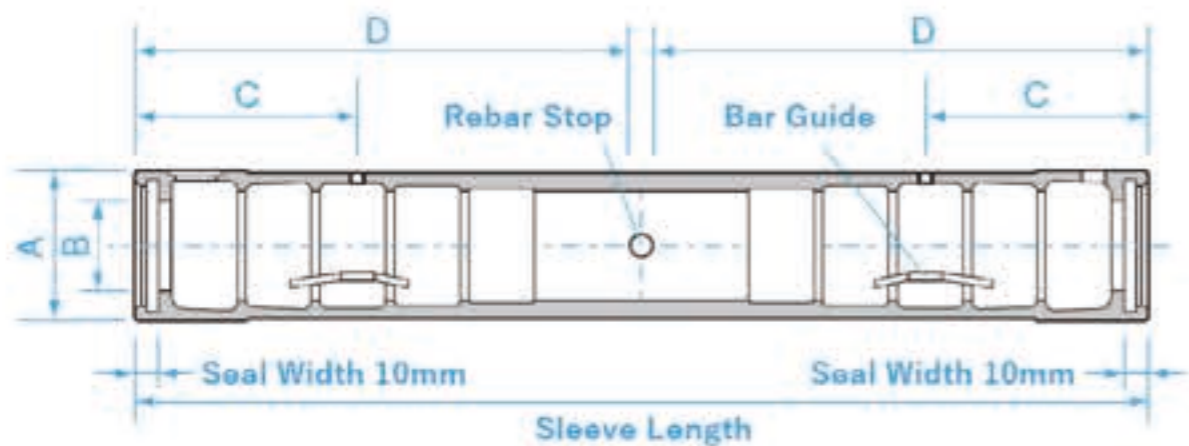


Sleeve	Rebar Size *(Applicable)	Sleeve Length (mm)	Sleeve Diameter (mm)		Set Screw (C) (mm)	Rebar Stop (D) (mm)	Bar Embedment (mm)	Usage: Number of Sleeves to be grouted per a bag of	
			O.D. (A)	I.D. (B)				SS Mortar (15kg)	SSM 120N (25kg)
S5U	D10,D13(D10) D16(D10,D13)	240	37	22	54	115	105 ~ 120	53	80
S6U	D19(D13,D16)	270	40	25	54	130	120 ~ 135	42	64
S7U	D22(D16,D19)	300	44	28	73	145	135 ~ 150	34	51
S8U	D25(D19,D22)	330	48	31	70	160	150 ~ 165	31	48
S9U	D29(D22,D25)	370	54	35	75	180	170 ~ 185	24	36
S10U	D32(D25,D29)	410	59	39	100	200	190 ~ 205	18	27
S11U	D35(D29,D32)	450	65	43	100	220	210 ~ 225	14	21
S12U	D38(D32,D35)	490	71	47	100	240	230 ~ 245	10	16
S13U	D41(D35,D38)	550	76	51	130	270	260 ~ 275	8	12
S16U	D51(D38,D41)	710	92	62	160	350	340 ~ 355	5	7

\* ( ) indicates applicable bar sizes for transition splice

## Assembly

### Horizontal Use

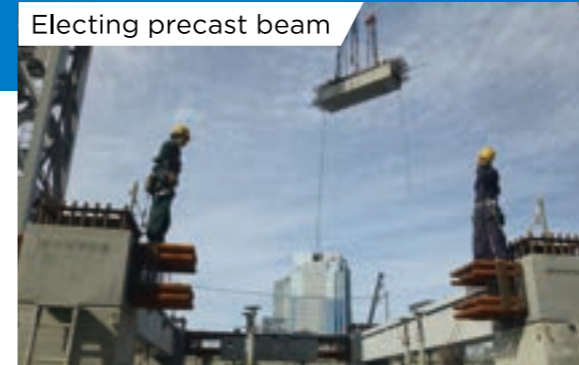

### Vertical Use





# SS Mortar® and SS Mortar® 120N

SS Mortar® grout is a non-shrink, high early strength cement grout developed only for use with the NMB Splice-Sleeve® Systems. The flowable grout can fill the interior of the sleeve completely. It comes premixed with select blended materials for easy use at the job site.



SS Mortar®





SS Mortar® 120N

## Mixing Conditions & Characteristics

	SS Mortar® (15kg)	SS Mortar® 120N (25kg)
Amount of water/bag	2.1-2.3 Liters (Average 2.2 Liters)	2.65-3.35 Liters (Average 3.0 Liters)
Mixing time	Approximately 2 minutes	
Consistency(Flow Guide Table)	155-235 mm diameter	185-285 mm diameter
Ambient Temperature(°C)	0-60	
Pot Life	Approximately 40 minutes after mixing	Approximately 60 minutes after mixing
Compressive Strength	Cylinder shaped mold	More than 70 N/mm <sup>2</sup>
	Cubic mold	More than 77 N/mm <sup>2</sup>

## Cumulative Temp & Compressive Strength

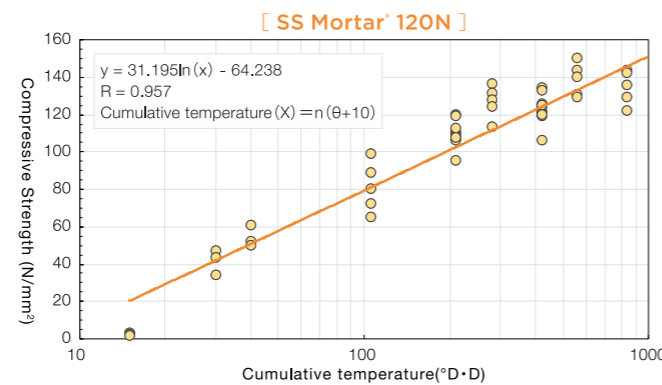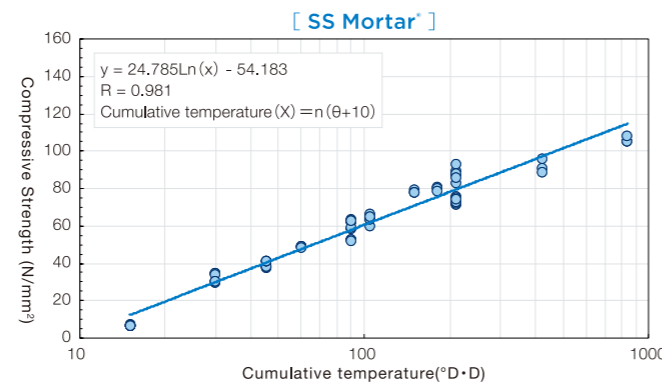


### Example of a test results on SS Mortar® and SS Mortar® 120N

Type	Amount of water (per bag)	Curing Temp. (Celsius)	Setting Time (hour - min.)		Compressive Strength (N/mm <sup>2</sup> )			
			Initial	Final	1 day	3 day	7 day	28 day
SS Mortar®	2.2 liters per bag (15kg/bag)	5	9-31	13-35	10.1	42.2	56.5	86.3
		20	4-18	5-55	30.5	55.2	71.1	100
		30	2-23	3-20	49.0	68.5	79.1	101
SS Mortar® 120N	3.0 liters per bag (25kg/bag)	5	9-55	15-00	4.62	39.0	107	129
		20	7-00	8-25	37.8	82.7	112	136
		30	6-05	7-00	60.4	93.4	128	144

# Technical Data

## Certifications

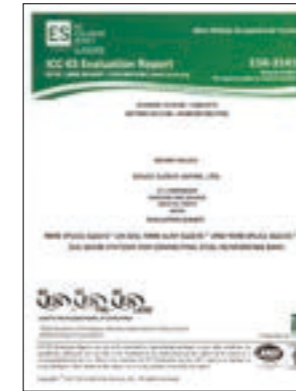

## Class SA requirements

### Test method and loading rules

Static tension test	0 → 0.95σ <sub>y0</sub> → 0.02σ <sub>y0</sub> → failure
Repeated tension test	0 → (0.02σ <sub>y0</sub> ↔ 0.95σ <sub>y0</sub> ) 30 times → failure
Elastic reversed cyclic test	0 → (0.95σ <sub>y0</sub> ↔ -0.5σ <sub>y0</sub> ) 20 times → failure
Plastic reversed cyclic test	(2ε <sub>y</sub> ↔ -0.5σ <sub>y0</sub> ) 4 times → failure (5ε <sub>y</sub> ↔ -0.5σ <sub>y0</sub> ) 4 times → failure
Static Compression test	(Not required)

σ<sub>y0</sub>:rebar's specified yield strength    ε<sub>y</sub>:yield strain of spliced bar

### Rigidity

Static tension test	0.7σ <sub>y0</sub> E ≥ E <sub>0</sub> 0.95σ <sub>y0</sub> E ≥ 0.9E <sub>0</sub>
Repeated tension test	30σ <sub>y0</sub> E ≥ 0.85E <sub>0</sub>
Elastic reversed cyclic test	20σ <sub>y0</sub> E ≥ 0.5E <sub>0</sub>

E<sub>0</sub>:rebar's Young's modulus  
E:rebar's secant modulus  
E<sub>0.30</sub>:rebar's secant modulus at stresses of 0.95σ<sub>y0</sub> at 1st or 30th loading.  
E<sub>0.20</sub>:rebar's secant modulus at stresses of 0.95σ<sub>y0</sub> at 1st or 20th loading  
σ<sub>y0</sub>:rebar's specified yield strength

### Ductility

Static tension test	ε <sub>u</sub> ≥ 20ε <sub>y</sub> & ε <sub>u</sub> ≥ 0.04
Repeated tension test	ε <sub>u</sub> ≥ 20ε <sub>y</sub> & ε <sub>u</sub> ≥ 0.04

ε<sub>u</sub>:ultimate strain of spliced bar    ε<sub>y</sub>:yield strain of spliced bar

### Tension and compression strength

Static tension test	σ <sub>b0</sub> ≥ 1.35σ <sub>y0</sub> or σ <sub>b0</sub> ≥ σ <sub>b0</sub>
Repeated tension test	σ <sub>b0</sub> ≥ 1.35σ <sub>y0</sub> or σ <sub>b0</sub> ≥ σ <sub>b0</sub>
Elastic/plastic reversed cyclic test	σ <sub>b0</sub> ≥ 1.35σ <sub>y0</sub> or σ <sub>b0</sub> ≥ σ <sub>b0</sub>
Static Compression test	(Not required)


σ<sub>b0</sub>:tensile strength of spliced bar    σ<sub>b0</sub>:rebar's specified tensile strength  
σ<sub>y0</sub>:rebar's specified yield strength

### Slip

Static tension test	δ <sub>s</sub> ≤ 0.3mm
Repeated tension test	30δ <sub>s</sub> ≤ 0.3mm
Elastic reversed cyclic test	20δ <sub>s</sub> ≤ 0.3mm
Plastic reversed cyclic test	4ε <sub>s</sub> ≤ 0.5ε <sub>y</sub> & 4ε <sub>s</sub> ≤ 0.3mm & 8ε <sub>s</sub> ≤ 1.5ε <sub>y</sub> & 8ε <sub>s</sub> ≤ 0.9mm

ε<sub>s</sub>:slip strain of spliced bar    ε<sub>y</sub>:actual yield strain of spliced bar  
δ<sub>s</sub>:slip deformation of spliced bar    σ<sub>y0</sub>:rebar's specified yield strength

## Test machines in our laboratory

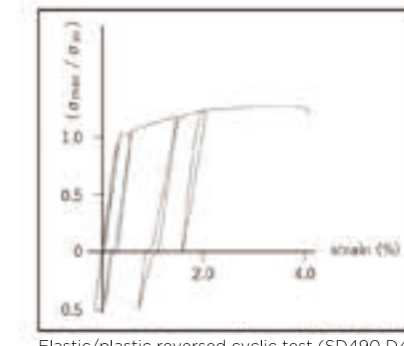

Elastic/plastic reversed cyclic test (SD490 D41)

### Fatigue Resistance Test

The fatigue resistance of splices with 2 million-stress cycles provides approximately 18kgf/mm<sup>2</sup> (minimum stress. min.=1.97kgf/mm<sup>2</sup>), which is 80 % of the strength of un-spliced rebar with 2 million-stress cycles.

### Fire resistant performance

1. No deterioration of the splicing performance was observed after the fire exposure, reaching up to 400°C on NMB Splice Sleeves not cast in concrete.
2. No deterioration of the splicing performance with 20mm concrete cover for 3 hours fire exposure at 1,200°C.



# Building Application

Exhibits high performance when used in integral structural members such as columns, beams, and walls.


The coupler's superiority shows earthquake resistance and ease of construction. NMB Splice-Sleeve® Systems are widely used for connecting reinforcing bars in high-rise buildings, especially in earthquake-prone countries, like Japan.

Connect column, beam, wall, and other essential structural components for Super High-Rise Buildings.

## Precast column and cast-in-place beam closure pour.




## Precast Wall

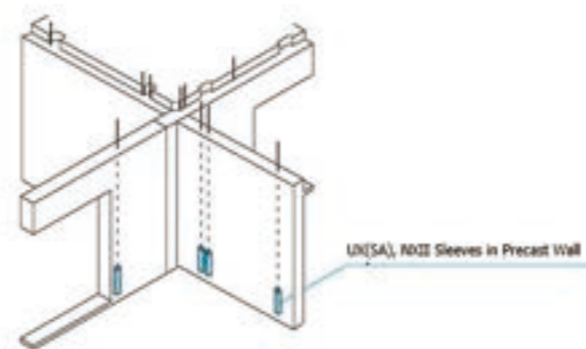

## Civil Engineering Precast Box Culvert



Box Culvert

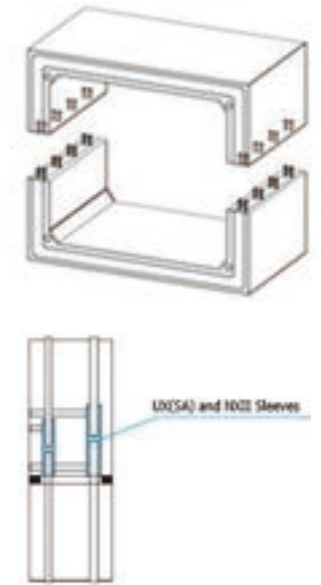

## Civil Engineering Cast-in-Place



RC Piles



Caisson Foundation



Beam Foundation